



SECURITY

Product Catalogue

CCTV



NVR



4MP WIRELESS DUAL BAND CAMERA

SY-DPT-DB



Crying Detection



Face Detection



Figure Detection



Human Detection



Siren Alarm



Two Way Talk
Access



Easy Mobile Remote



IR Night Vision



4MP image Quality



Privacy Cover



Local (Up to 256GB)/
Cloud Storage



Preset Position



Motion Detection



2.4 GHz/5GHz Wi-Fi



TRUE NIGHT VISION IP CAMERA

2MP IP Dome/Bullet Camera



SY-2M-DIP

2MP IP 1080P True Night vision 1/3" Progressive Scan CMOS Sensor, Auto: 1/3-1/100000Sec, H.264/H.265/JPEG/AVI/MJPEG, 3.6 mm horizontal FOV 78°, vertical FOV 41.8°, diagonal FOV 95.4°, 42μ x 2PCS 25M IR Distance, Built-in MIC, Plastic Housing



SY-2M-BIP

2MP IP 1080P True Night vision, 1/3" Progressive Scan CMOS Sensor, Auto: 1/3-1/100000Sec H.264/H.265/JPEG/AVI/MJPEG.3.6 mm, horizontal FOV 78°, vertical FOV 41.8°, diagonal FOV 95.4°, 42μ x 2PCS 25M IR Distance, Built-in MIC, Plastic IP66 Housing

4MP IP Dome/Bullet Camera



SY-4M-DIP

4MP IP 2560(H)*1440(V) True Night vision, 1/3" Progressive Scan CMOS Sensor Auto: 1/3-1/100000Sec H.264/H.265/JPEG/AVI/MJPEG. 3.6 mm, horizontal FOV 78°, vertical FOV 41.8°, diagonal FOV 95.4°, 42μ x 2PCS 25M IR Distance. Built-in MIC, Plastic Housing.



SY-4M-BIP

4MP IP 2560(H)*1440(V) True Night vision, 1/3" Progressive Scan CMOS Sensor Auto: 1/3-1/100000Sec H.264/H.265/JPEG/AVI/MJPEG.3.6 mm, horizontal FOV 78°, vertical FOV 41.8°, diagonal FOV 95.4° 42μ x 2PCS 25M IR Distance, Front Cover: Metal, Back Cover: Plastic, IP67 Housing.

FULL COLOR IP CCTV CAMERA

2/4/8 MP IP Dome Camera



SY-2M-DM-IPC

2MP IP 1080P Full Color View 1/2.9" Progressive Scan CMOS Sensor Auto: 1/3-1/100000Sec H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG. 3.6 mm, horizontal FOV 84°, vertical FOV 43°, diagonal FOV 100°, Warm light LED 4000K, up to 25m, 1 Built-in MIC, Metal IP67 Housing



SY-4M-DM-IPC

4MP IP 2560(H) 1440(V) Full Color View 1/3 Progressive Scan CMOS Sensor, Auto: 1/3-1/100000Sec H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG. 3.6mm, horizontal FOV 81°, vertical FOV 41°, diagonal FOV 96°, warm light LED 4000k, up to 25m, Built in MIC, Metal IP67 Housing



SY-8M-DM-IPC

8MP IP 3864(H) *2192(V) Full Color View 1/2.8" SONY Starvis Back-illuminated CMOS sensor, Auto: 1/3-1/100000 Sec, H.264/H.264+/H.265/H.265+/JPEG/AVI. 3.6mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 100°, warm light LED 4000k, up to 25m, Built in MIC, Metal IP67 Housing

2/4/8 MP IP Bullet Camera



SY-2M-BM-IPC

2MP IP 1080P Full Color View 1/2.9" Progressive Scan CMOS Sensor Auto: 1/3-1/100000 Sec H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG. 3.6 mm, horizontal FOV 84°, vertical FOV 43°, diagonal FOV 100°, Warm light LED 4000K, up to 25m, 1 Built-in MIC, Metal IP67 Housing



SY-4M-BM-IPC

4MP IP 2560(H)*1440(V) Full Color View 1/3" Progressive Scan CMOS Sensor, Auto: 1/3-1/100000 Sec H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG. 3.6mm, horizontal FOV 81°, vertical FOV 41°, diagonal FOV 96°, warm light LED 4000k, up to 25m, Built in MIC, Metal IP67 Housing



SY-8M-BM-IPC

8MP IP 3864(H) *2192(V) Full Color View 1/2.8" SONY Starvis Back-illuminated CMOS sensor, Auto: 1/3-1/100000 Sec, H.264/H.264+/H.265/H.265+/JPEG/AVI. 3.6mm, horizontal FOV 84°, vertical FOV 45°, diagonal FOV 100°, warm light LED 4000k, up to 25m, Built in MIC, Metal IP67 Housing

TRUE NIGHT VISION AHD CAMERA

2MP AHD Dome/Bullet Camera



SY-2M-DHD

2MP True Night vision AHD 2M:1920*1080, 1/3" CMOS Sensor, 3.6mm Fixed Lens, 14μ x 18PCS 20M IR Distance, Plastic Housing.



SY-2M-BHD

2MP True Night vision AHD 1920*1080, 1/3" CMOS Sensor, 3.6mm Fixed Lens, 14μ x 18PCS 20M IR Distance, Plastic IP66 Housing.

5MP AHD Dome/Bullet Camera



SY-5M-DHD

5MP True Night vision AHD 5M:2592*1944 4M:2560*1440 2M:1920*1080, 1/2.5" CMOS sensor, 3.6mm Fixed Lens, 14μ x 18PCS 20M IR Distance, Plastic Housing.



SY-5M-BHD

5MP True Night vision AHD 5M:2592*1944 4M:2560*1440 2M:1920*1080, 1/2.5" CMOS sensor, 3.6mm Fixed Lens, 14μ x 18PCS 20M IR Distance, Plastic IP66 Housing

FULL COLOR AHD CAMERA

2MP Color AHD Dome/Bullet Camera



SY-2M-DHDC

2MP Full Color View AHD 2M:1920*1080, 1/3" CMOS Sensor, 3.6mm Fixed Lens, Warm white (4000K) 25m IR Distance, Coaxil Audio (only TVI mode) Eyeball: Metal Cover & Base: Plastic, IP65 Housing.



SY-2M-BHDC

2MP Full Color View AHD 2M:1920*1080, 1/3" CMOS Sensor, 3.6mm Fixed Lens, Warm white (4000K) 25m IR Distance, Coaxil Audio (only TVI mode) Eyeball: Metal Cover & Base: Plastic, IP65 Housing

5MP Color AHD Dome/Bullet Camera



SY-5M-DHDC

5MP Full Color View AHD 5M:2592*1944 4M:2560*1440 2M:1920*1080, 1/2.5" CMOS sensor, 3.6mm Fixed Lens, Warm white (4000K) 25m IR Distance, Coaxil Audio (only TVI mode) Eyeball: Metal Cover&Base: Plastic, IP65 Housing.



SY-5M-BHDC

5MP Full Color View AHD 5M:2592*1944 4M:2560*1440 2M:1920*1080, 1/2.5" CMOS sensor, 3.6mm Fixed Lens, Warm white (4000K) 25m IR Distance, Coaxil Audio (only TVI mode) Eyeball: Metal Cover&Base: Plastic, IP65 Housing.

NVR (NETWORK VIDEO RECORDER)

LIGHT SERIES NVR



SY-9NVR-1H-4K

9CH 4K NVR Embedded LINUX, Incoming/Outgoing Bandwidth 80/80 Mbps, 4k Display
Resolution:3840x2160 1920x1080 1280x1024 1280x720 1024x768, Recording 4k(3840x2160), 5MP (2592x1944), 4MP (2688x1520/2560x1440), 3 MP (2048x1536), 1080P(1920x1080),960P (1280x960), 720P (1280x 720), D1 (720x576/720x480),1 SATA Interface Capacity 1 SATA Hard Disk (2.5/3.5" SATA, Up to 8TB), Support Web Browser Edge,IE8-11, Google Chrome, Firefox, Safari.



SY-16NVR-1H-4K

16CH 4K NVR Embedded LINUX, Incoming/Outgoing Bandwidth 120/120 Mbps, 4k Display
Resolution:3840x2160 1920x1080 1280x1024 1280x720 1024x768, Recording 4k(3840x2160), 5MP (2592x1944), 4MP (2688x1520/2560x1440), 3 MP (2048x1536), 1080P(1920x1080),960P (1280x960),720P (1280x 720), D1 (720x576/720x480),1 SATA Interface Capacity 1 SATA Hard Disk (2.5/3.5" SATA, Up to 8TB), Support Web Browser Edge,IE8-11, Google Chrome, Firefox, Safari.



SY-32NVR-2H-4K

32CH 4K NVR Embedded LINUX, Incoming/Outgoing Bandwidth 320/256 Mbps, 4k Display
Resolution:3840x2160 1920x1080 1280x1024 1280x720 1024x768, Recording 4k (3840x2160),5MP (2592x1944), 4MP (2688x1520/2560x1440),3MP (2048x1536),1080P(1920x1080),960P (1280x960),720P(1280x720), D 1 (720x576/720x480), 2 SATA Interface Capacity 1 SATA Hard Disk (2.5/3.5" SATA, Up to 8TB), Support Web Browser Edge,IE8-11, Google Chrome, Firefox, Safari

LIGHT SERIES XVR (SMART VIDEO RECORDER)

XVR (2K)



SY-4XVR-1H-2K

4CH 2K XVR Embedded LINUX Analog/AHD/CVI/TVI 2.0/TVI 3.0/Network, 2k Display Resolution: 1920 x 1080P/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz, 1024 x 768/60Hz, Recording 5MP Lite (1296x1952),4MP Lite (1280x1440),3MP Lite (102 4x1536),1080N (960x1080),720P(1280x720),960H (960x480), 1 SATA Interface Capacity 1 SATA Hard Disk (2.5/3.5" SATA, Up to 8TB), Support Web Browser Edge,IE8-11, Google Chrome, Firefox, Safari.



SY-8XVR-1H-2K

8CH 2K XVR Embedded LINUX Analog/AHD/CVI/TVI 2.0/TVI 3.0/Network, 2k Display Resolution: 1920 x 1080P/60Hz 1280 x 1024/60Hz, 1280 x 720/60Hz, 1024 x 768/60Hz, Recording 5MP Lite (1296x1952),4MP Lite (1280x1440),3MP Lite Line(102 102 4x1536),1080N (960x1080),720P (1280x720),960H (960x480), 1 SATA Interface Capacity 1 SATA Hard Disk (2.5/3.5" SATA, Up to 8TB) Support Web Browser Edge,IE8-11,



SY-16XVR-1H-2K

16CH 2K XVR Embedded LINUX Analog/AHD/CVI/TVI 2.0/TVI 3.0/Network, 2k Display Resolution: 1920 x 1080P/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz,1024 x 768/60Hz, Recording 5MP Lille(1296x1952),4MP Lite (1280x1440),3MP Lite (1024x1536), 1080N (960x1080), 720P (1280x720),960H(960x480), 1 SATA Interface Capacity 1 SATA Hard Disk (2.5/3.5 SATA, Up to 8TB), Support Web Browser Edge,IE8-11, Google Chrome, Firefox, Safari

XVR(4K)



SY-8XVR-1H-4K

8CH 4K XVR Embedded LINUX Analog/AHD/CVI/TVI 2.0/TVI 3.0/Network, 4k Display Resolution:3840x2160 1920x1080 1280x1024 1280x720 1024x768, Recording 5MP (2592x1944),8MP_LITE(1920x2160),5MP HALF(1296 x1944),4MP (2560x1440),4MP_HALF (1280x1440), 3MP (2048 x1536),3MP Lite (1024x1536), 1080P(1920x1080),720P (1280 x720),960H(960x480), 1 SATA Interface Capacity 1 SATA Hard Disk (2.5/3.5" SATA, Up to 8TB), Support Web Browser Edge,IE8-11, Google Chrome, Firefox, Safari.



SY-16XVR-2H-4K

16CH 4K XVI XVR Embedded LINUX Analog/AHD/CVI/TVI 2.0/TVI 3.0/Network, 4k Display Resolution:3840x2160 1920x1080 1280x1024 1280x720 1024x768, Recording 5MP (2592x1944),8MP_LITE(1920x2160),5MP HALF(1296 x1944),4MP (2560x1440), 4MP HALF (1280x1440),3MP (2048 F(1280) 048 x1536),3MP Lite (1024x1536), 1080P(1920x1080),720P (1280 x720),960H(960x480), 2 SATA Interface 2 SATA Hard Disk (2.5/3.5 SATA, Up to 16TB), Support Web Browser Edge,IE8-11, Google Chrome, Firefox, Safari.



POE / NON POE SWITCHES

L2/L3 MANAGED SWITCH



SY-8000-4X-L2

8*10/100/1000Mbps Base-T
4*1000M Base-X SFP/10GE SFP+



SY-2400-4X-L2

24*10/100/1000Mbps Base-T
4*1000M Base-X SFP/10GE SFP+



SY-2400S-4X-DP

24*1000Mbps Base-X SFP
4*1000M Base-X SFP/10GE SFP+



SY-2400X-2Q28-L3

24*10SFP+,
2*40/100G QSFP

L2 MANAGED POE SWITCH



SY-8000P-2S-120W-L2

8*10/100/1000Mbps POE Port
+2*GE SFP Port, 1 Console Port,
IEEE 802.3af/at, 120W POE Power,
L2 Managed



SY-8000P-2S-150W-L2

8*10/100/1000Mbps POE Port
+2*GE SFP Port, 1 Console Port,
IEEE 802.3af/at, 150W POE Power,
L2 Managed



SY-2400P-4S-400W-L2

24*10/100/1000Mbps POE Port
+4*GE SFP Port, 1 Console Port,
Managed L2 Switch, af/at, 400W, Built-in Power

INDUSTRIAL POE SWITCH



SY-4000P-2S-IND

POE 4 Port Industrial Switch,
4*10/100/1000Mbps POE Port
+2*GE SFP Uplink Port,
IEEE 802.3af/at, L2 Managed
Temp-40°~75° C



SY-8000P-2S-IND

POE 8 Port Industrial Switch,
8*10/100/1000Mbps POE Port
+2*GE SFP Uplink Port,
IEEE 802.3af/at, L2 Managed
Temp-40°~75°C



SY-1016P-4S-IND

POE 16 Port Industrial Switch
16-Port 10/100/1000Mbps RJ45
4-Port 10/100/1000Mbps SFP module
Console ports x1
Temp-40°~75°C



SY-SMPS-4825DR

DIN RAIL MOUNT
SMPS 48V 2.5A
Input Voltage 100-265VAC
Output Voltage - 48VDC

UNMANAGED POE SWITCH



SY-0400P-2T-65W

4*10/100Mbps POE Port
+2*10/100Mbps Uplink Port,
IEEE 802.3af/at, 65W POE Power,
Extend 250 Meters



SY-4000P-2T-96W

4*10/100/1000Mbps POE Port
+2*10/100/1000Mbps Uplink Port,
af/at, 96W POE Power,
Extend 250 Meters



SY-8000P-2T-2S-150W

8*10/100/1000Mbps POE Port
+2*10/100/1000Mbps &
2G SFP Uplink Port,
Support af/at Standard,
150W Extend 250 Meters



SY-0800P-2G-120W

8*10/100Mbps POE Port
+2GE Uplink
Support af/at Standard,
120W Extend 250 Meters



SY-8000P-2T-150W

8*10/100/1000Mbps POE Port
+2*10/100/1000Mbps Uplink Port,
af/at, 150W POE Power,
Extend 250 Meters



SY-2400P-2T-2S-400W


24*10/100/1000Mbps POE Port
+2*10/100/1000Mbps & 2GE SFP,
Uplink Port, IEEE802.3af/at
Standard, 320W POE Power,
Extend 250 Meters



SY-1005

DESKTOP SWITCH

5*10/100/1000Mbps
Auto-Negotiation RJ45 Port
(Auto MDI/MDIX)
RJ45 Port (Auto MDI/MDIX)




SY-1008

DESKTOP SWITCH

8*10/100/1000Mbps
Auto-Negotiation RJ45 Port
(Auto MDI/MDIX)
RJ45 Port (Auto MDI/MDIX)

GPON FTTH ARCHITECTURE

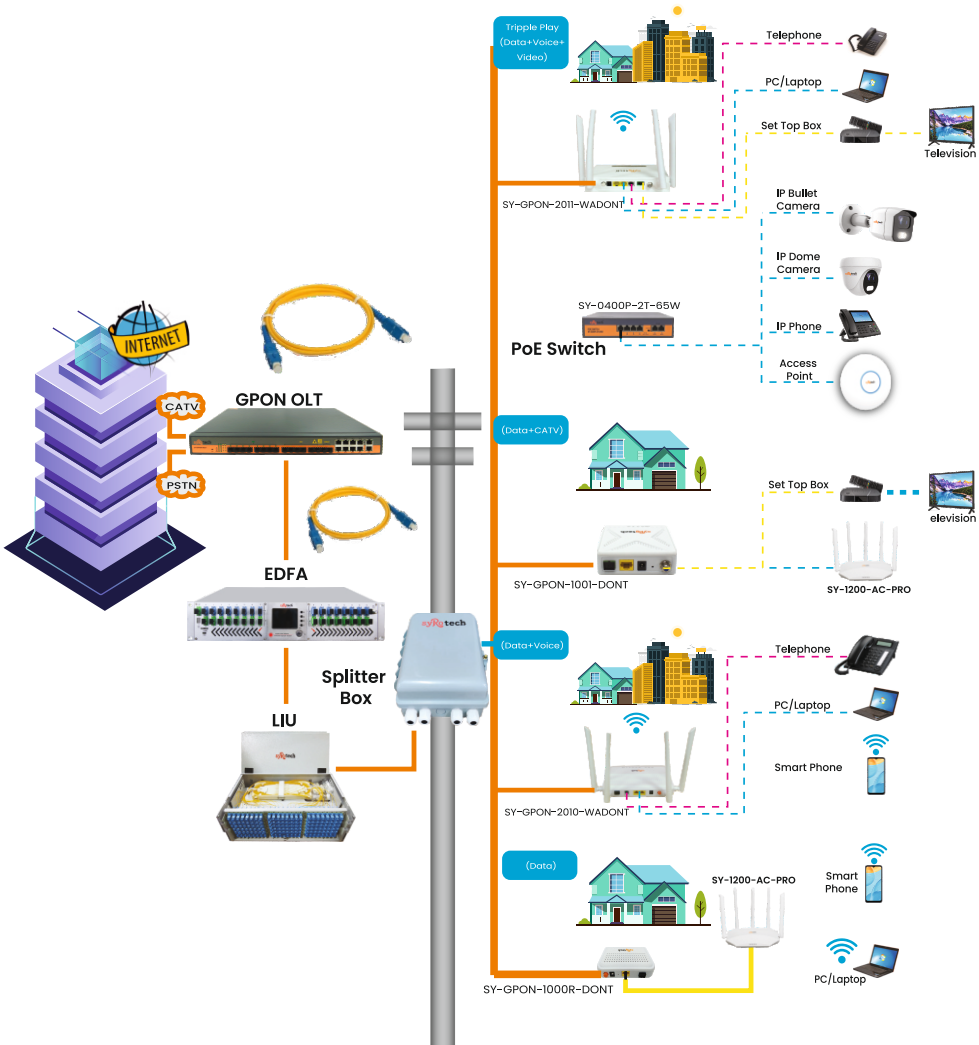

Automatic Number Plate Recognition Camera



2MP



4MP



AUTO WB



IR DISTANCE
50-70 m



HLC



PoE



DEFOG



WDR



DAY & NIGHT



BLC



-30° ~ 60°



H.265



WEATHER
PROOF



HD



PTZ VISION

Zooming Beyond Boundaries

(STARLIGHT)



INTRUSION
DETECTION



LINE CROSSING
DETECTION



REGION ENTRANCE
DETECTION



REGION EXITING
DETECTION



UNATTENDED
BAGGAGE DETECTION



OBJECT REMOVAL
DETECTION



SCENE CHANGE
DETECTION



SUPPORT ALARM
TRIGGERING



MANUAL
TRACKING



AUTO
TRACKING



DIGITAL
ZOOM 16X



OPTICAL
ZOOM 30X



WDR
120 DB



FACE
RECOGNIZE



NIGHT VISION
COLOR LIGHT



UPTO
256 GB

syrotech[®]
NETWORKS

GO IP Global Services Pvt. Ltd.

Loc-ation : H-68, Sector-63, Noida-201307 (UP), India

Mail : info@syrotech.com

Website : www.syrotech.com

Toll Free : 08069226100